

EyeCom Outdoor Vandal IR Dome



CC-9105DN



- ✓ INDOOR/OUTDOOR NIGHT VISION VANDAL DOME CAMERA
- ✓ 1/3" SONY SUPER HAD CCD
- ✓ OUTDOOR WEATHER PROOF: IP66
- ✓ NIGHT VISION UP TO 65 FT.
- ✓ TRI-AXIS FLEXIBLE CEILING & WALL MOUNTING




Specifications

CC-9105DN/DH

Model	CC-9105DN	CC-9105DH
Image Pick-up Device	1/3" Sony Super HAD CCD	
Effective Picture Elements	537x597 NTSC (HxV)	811x508 NTSC (HxV)
Horizontal Resolution	More than 420 TV Lines	550 TV Lines
Minimum Illumination	0 LUX for Infrared Lighting Conditions	
S/N Ratio	45dB	
Auto Electronic Shutter	NTSC: 1/60~1/100,000 / PAL: 1/50~1/100,000	
Iris Control	Auto	
Gamma Characteristic	0.45	
Lens Mount	Fixed 3.6mm Lens (F=2.0)	
Backlight Compensation	Auto	
AGC	Auto	
Synchronous System	Negative Sync. Internal	
Video Output	1Vp-p Composite Video/75 Ohms	
Power Supply	DC 12V, 350mA Max	DC 12V, 370mA Max
Operating Temperature	-10°C~50°C / 14°F~122°F	
Dimensions	3.66 (W) x 3.15 (D) inches	
Weight	1.19 lbs	

* Specifications Subjected to Change Without Prior Notice

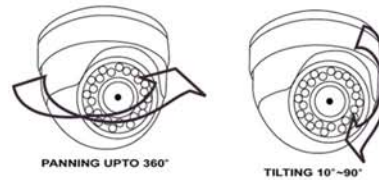

CC-9105DHL2



- ✓ INDOOR/OUTDOOR NIGHT VISION VARI-FOCAL VANDAL DOME CAMERA
- ✓ 1/3" SONY H.Q.1 SUPER HAD CCD ~ 550 TV LINES
- ✓ OUTDOOR WEATHER PROOF: IP66
- ✓ AUTO IRIS & VARI-FOCAL 4~9MM LENS
- ✓ EXTERNAL FOCUS & ZOOM ADJUSTMENT
- ✓ NIGHT VISION UP TO 65 FT.
- ✓ TRI-AXIS FLEXIBLE CEILING & WALL MOUNTING



Specifications

CC-9105DHL2

Image Pick-up Device	1/3" Sony H.Q. 1 Super HAD CCD
Total Pixels	NTSC: 811(H)x508(V), PAL: 795(H)x596(V)
Effective Pixels	NTSC: 768(H)x494(V), PAL: 752(H)x582(V)
Scanning System	Interlace
Frequency	NTSC:15,374KHz(H)/59.94Hz, PAL:15,625KHz(H)/50Hz
Horizontal Resolution	550 TV Lines
Video Output	1Vp-p, 75Ω composite
S/N (Y signal)	50dB (AGC OFF)
Minimum Illumination	0.3Lux/F1.2(Color), 0.1Lux/F1.2(B/W)
Color	Auto Day/Night
Gain Control	Off/Low/Middle/High
White Balance	ATW/AWC/Manual/Fixed
Shutter Speed	Auto/Fixed/Manual/FLK
Backlight	On/Off
Iris Control	Auto, DC Iris
AGC Control	Low/High
Mirror	Built-in (Horizontal Image Inversion)
Lens Mount	Vari-Focal DC Auto Iris Lens 4~9mm
Supplied Voltage	9.5V~15V(12V ± 0.5V Recommended)
Power Supply	DC12V/140mA(Max 1.7W) (CDS ON:450mA Max)
IR Range	50 ft.
LED Quantity	24 pcs.
Operating Temperature	14°F~122°F (-10°C~50°C)
Operating Humidity	10~85% RH
Dimensions	4.72(W) in. x 3.94 in.
Weight	Approximately 1.76 lbs.

* Specifications Subjected to Change Without Prior Notice

